



—  
your partner  
in sensor  
technology.



# Datasheet MOP301

Digital Moisture in Oil Immersion Probe  
up to 120 °C (248 °F)



# MOP301

## Digital Moisture in Oil Immersion Probe up to 120 °C (248 °F)

The MOP301 reliably measures the moisture in transformer, lubrication or hydraulic oil as well as in diesel fuel. It is ideal for the preventive maintenance of equipment and machinery. Besides the accurate measurement of water activity (aw) and temperature (T), the MOP301 calculates the absolute water content of the oil (x) in ppm. The dynamic calculation is based on oil-specific solubility parameters.

### Measurement Performance

The probe employs high end E+E humidity sensing elements with outstanding long term stability and high resistance to pollution.

### Versatility

Various cable and probe lengths, together with the sliding fitting facilitate the MOP301 installation. Using the optional ball valve, the probe can be mounted or removed without process interruption.

### RS485 Interface

The measured data is available on the RS485 interface with Modbus RTU protocol. The oil resistant cable with moulded M12 connector assures reliable data transmission even in harsh and aggressive environment.

### Configurable and Adjustable

The free PCS10 Product Configuration Software and the optional adapter facilitate the setup and adjustment of the MOP301.



MOP301 with ball valve G 1/2" ISO



MOP301 pressure-tight probe with sliding fitting

# Features



## Measurement Performance

- High measurement accuracy:
  - Water activity  $a_w$
  - Temperature  $T$
- Suitable for transformer, lubrication and hydraulic oil
- Calculation of water content  $x$  [ppm]
- Temperature range:  $-40...+120\text{ }^{\circ}\text{C}$  ( $-40...+248\text{ }^{\circ}\text{F}$ )
- Temperature compensation



## Interface and Connection

- RS485 with Modbus RTU
- Oil resistant cable
- Moulded M12x1 connector

## Mechanical Construction

- Stainless steel enclosure and filter cap
- Pressure-tight up to 20 bar (290 psi)
- Process connection with ISO or NPT sliding fitting
- IP66 rating

## Inspection certificate

According to DIN EN 10204-3.1

# Features

## Measurement of water activity $a_w$ / water content $x$

The moisture in oil can be expressed in absolute or relative terms.

- **Water activity  $a_w$**  is the relative measure for moisture in oil. It represents the ratio between the actual amount of dissolved water and the maximum possible amount of dissolved water in the oil at a certain temperature. Independently of the oil type, the water activity shows how close to saturation the oil is at any moment in time.  $a_w = 0$  indicates completely dry oil, while  $a_w = 1$  fully saturated oil. MOP301 measures the water activity directly.
- The **water content  $x$**  is an absolute measure for the amount of water in the oil (dissolved, emulsified or separated). The water content is usually expressed in ppm or mg water/kg oil and it is independent from the oil temperature. For assessing the degree of saturation,  $x$  must be regarded together with  $T$ . MOP301 calculates  $x$  based on the measured  $a_w$  and  $T$  values. The calculation is oil dependent and requires a set of oil specific parameters. E+E offers the service of determining the oil specific parameters, see section “Ordering Guide” below. The parameters can be set upon order or uploaded to MOP301 using the PCS10 Product Configuration Software.

## Sensor Leads Protection

In certain applications, the oil can become corrosive over time, for example due to continuous contamination of lubricating oils by salt water in the maritime environment. In such demanding applications, the E+E proprietary protection of the sensing element leads can significantly extend the service life of the sensor.

## E+E Modular Sensor Platform

The MOP301 is compatible with the Sigma 05 host device of the E+E Modular Sensor Platform. Together they become a versatile, plug-and-play  $a_w/x$  modular sensor with analogue outputs and optional display. Besides MOP301, Sigma 05 accommodates also other E+E intelligent sensing probes. See [www.epluse.com/sigma05](http://www.epluse.com/sigma05) for further details.




Sigma 05 polycarbonate enclosure with MOP301

# Dimensions


Values in mm (inch)

## Types

Type T4

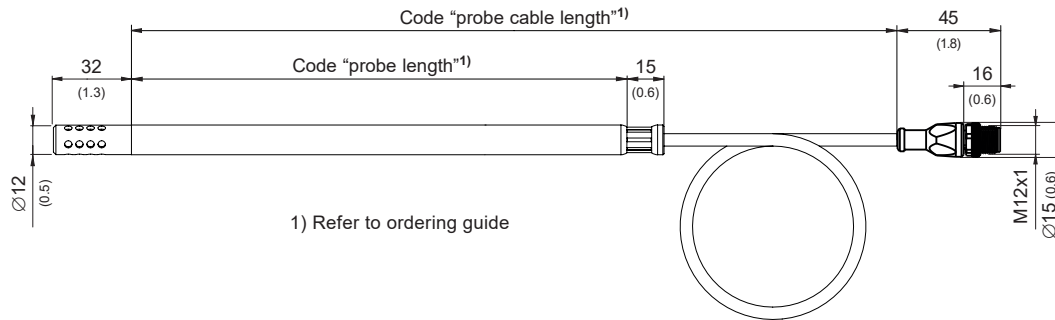


Type T10, 20 bar

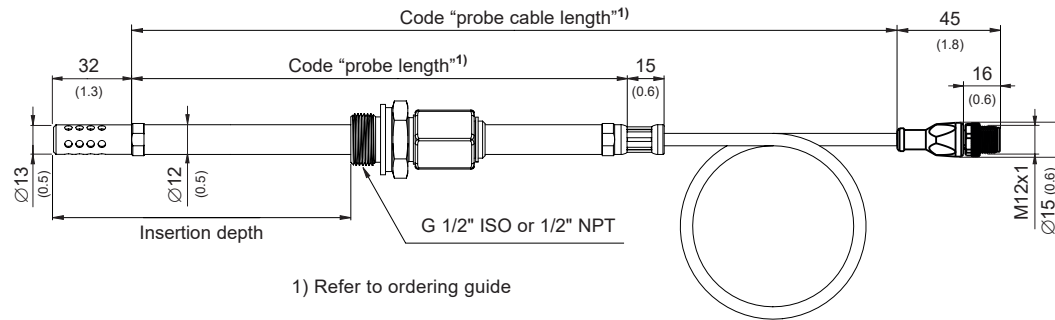


| Probe length [mm (inch)] | Min. insertion depth [mm (inch)] | Max. insertion depth [mm (inch)] |
|--------------------------|----------------------------------|----------------------------------|
| 200 (7.9)                | 23 (0.9)                         | 167 (6.6)                        |
| 400 (15.7)               | 23 (0.9)                         | 367 (14.4)                       |

## Ball valve

G 1/2" ISO

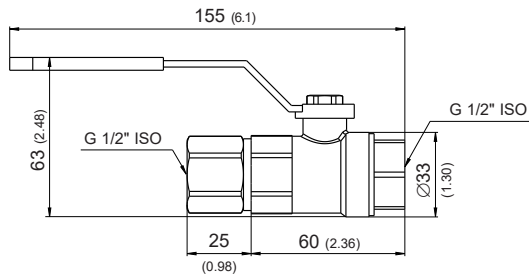

1/2" NPT

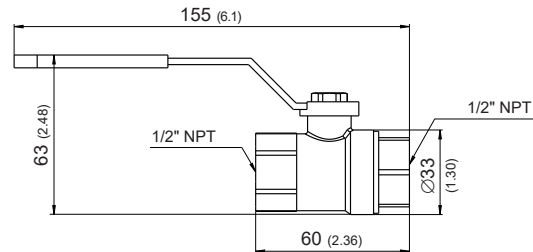

# Technical Data

## Measurands


### Water activity (aw) / water content (x)

|   |  |
|---|--|
| <b>Measuring range</b>  | 0...1 aw<br>0...100000 ppm; actual range depends on the oil type, for non-mineral transformer oil, specific solubility parameters are needed (ppm output is valid in the range 0...100 °C (32...212 °F)) |
| <b>Accuracy<sup>1)</sup></b><br>including hysteresis, non-linearity and repeatability<br><b>0...40 °C (32...104 °F) (0...0.9 aw)</b><br><b>-40...+120 °C (-40...+356 °F) (0.9...1 aw)</b> | $\pm 0.02$ aw<br>$\pm 0.025$ aw<br>$\pm 0.03$ aw   |
| <b>Response time <math>t_{90}</math>, typ.</b><br>@ 20 °C (68 °F) in still oil  | 10 min.  |
| <b>Resolution</b>   | 0.0001 aw  |

1) Traceable to international standards, administrated by NIST, PTB, BEV...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor  $k=2$  (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

### Temperature (T)
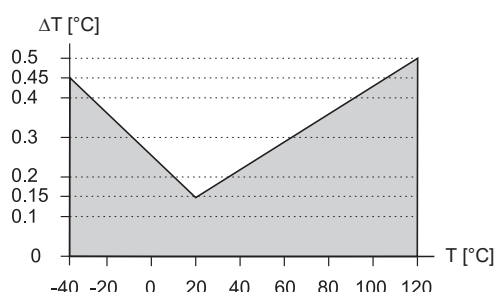
|                              |   |
|------------------------------|---|
| <b>Measuring range</b>       | -40...+120 °C   |
| <b>Accuracy<sup>1)</sup></b> |  <p>The graph plots temperature accuracy <math>\Delta T</math> in °C against temperature <math>T</math> in °C. The x-axis ranges from -40 to 120 °C with major ticks every 20 units. The y-axis ranges from 0 to 0.5 °C with major ticks every 0.05 units. A V-shaped curve represents the accuracy, starting at approximately 0.45 °C at -40 °C, reaching a minimum of about 0.15 °C at 20 °C, and rising back to approximately 0.45 °C at 120 °C. The area under the curve is shaded gray.</p> |
| <b>Resolution</b>            | 0.01 °C   |

1) Traceable to international standards, administrated by NIST, PTB, BEV...

The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor  $k=2$  (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).





# Technical Data

## Output

### Digital

|   |  |
|---|--|
| <b>Digital interface</b>  | RS485 (MOP301 = 1 unit load)   |
| <b>Protocol</b><br><b>Factory settings</b><br><b>Supported Baud rates</b><br><b>Measured data types</b> | Modbus RTU<br>9 600 Baud, parity even, 1 stop bit, Modbus address 70<br>9 600, 19 200, 38 400, 57 600, 76 800 und 115 200<br>FLOAT32 and INT16 |

## General

|  |   |                                  |                                       |
|--|---|----------------------------------|---------------------------------------|
| <b>Power supply</b> class III <br>USA & Canada: Class 2 supply necessary,<br>max. voltage 30 V DC | 8 - 35 V DC   |                                  |                                       |
| <b>Power consumption</b> , typ.<br>without termination resistor @ 24 V DC/AC   | 40 mW   |                                  |                                       |
| <b>Electrical connection</b>   | M12x1, 4 poles  |                                  |                                       |
| <b>Pressure rating</b>   | 20 bar (290 psi)  |                                  |                                       |
| <b>Temperature working range</b><br><b>Sensing element + filter cap</b><br><b>Probe</b><br><b>Cable</b><br><b>M12 connector</b>  | -40...+125 °C (-40...+257 °F)<br>-40...+120 °C (-40...+248 °F)<br>-40...+120 °C (-40...+248 °F)<br>-25...+90 °C (-13...+194 °F)   |                                  |                                       |
| <b>Storage conditions</b>  | -40...+80 °C (-40...+176 °F)<br>0...95 %RH, non-condensing  |                                  |                                       |
| <b>Material</b><br><b>Cable jacket</b> <sup>1)</sup><br><b>Probe</b>   | HFS 125XL, black, oil and fuel resistant<br>Stainless steel 1.4404  |                                  |                                       |
| <b>Protection rating</b>   | IP66 / NEMA 4X  |                                  |                                       |
| <b>Electromagnetic compatibility</b>   | EN 61326-1<br>FCC Part15 Class B  | EN 61326-2-3<br>ICES-003 Class B | Industrial Environment<br>DNV-CG-0339 |
| <b>Shock and vibration</b>   | Tested acc. to EN 60068-2-6, EN 60068-2-27 and DNV-CG-0339  |                                  |                                       |
| <b>Conformity</b>  |    <sup>2)</sup> |                                  |                                       |
| <b>Type approval</b>   | DNV Certificate No. TAA00003FA  |                                  |                                       |
| <b>Configuration and adjustment</b>  | PCS10 Product Configuration Software ( <a href="#">free download</a> ) and configuration adapter  |                                  |                                       |

1) Please mind the mounting and installing instructions included in the user manual.

2) DNV scope of approval: please refer to ordering guide.

# Ordering Guide

## Positon 1: Probe

| Feature       | Description  | Code  |                      |
|---------------|--|---|----------------------|
| Configuration |  | MOP301-   |                      |
|               | Approval   | No code   |                      |
|               |  | AP2   |                      |
|               | Type   | Probe up to 120 °C (248 °F)   | T4                   |
|               |  | Remote probe with sliding fitting, pressure-tight up to 20 bar (290 psi) and 120 °C (248°F) | T10                  |
|               | Filter   | Stainless steel, for flow <1 m/s (3.3 ft/s)   | F13                  |
|               |  | Stainless steel, for flow >1 m/s (3.3 ft/s)   | F18                  |
|               | Probe cable length (incl. probe length)            | 2 m (6.6 ft)  | K2                   |
|               |  | 5 m (16.4 ft)   | K5                   |
|               |  | 10 m (32.8 ft)  | K10                  |
|               | Probe length                                       | 200 mm (7.9"), DNV approval selectable  | L200                 |
|               |  | 400 mm (15.7")  | L400                 |
|               | Process connection                                 | G 1/2" ISO - sliding fitting, Ø13 mm (0.51")  | PA23                 |
|               |  | 1/2" NPT - sliding fitting, Ø13 mm (0.51")  | PA25                 |
|               | Sensing element protection                         | Without   | C0                   |
|               |  | Sensor leads protection   | C2                   |
|               | Oil parameterization for water content calculation | Mineral transformer oil   | No code              |
|               |  | Customer specific oil   | PPMxxx <sup>1)</sup> |

1) DNV approval available for probe length 200 mm (7.9") only

## 1) Positon 2: Procedure for customer specific oil

| Option  | Description  | Code       |
|---|--|------------|
| Oil number is known                               | Replace the xxx by the corresponding number  |            |
| Obtaining new oil parameters via oil analysis     | Contact and provide E+E HQ the datasheet of the oil before sending us 2 litres of oil. After determination of the oil specific parameters, the corresponding oil number is available, insert this in place of the xxx. | Oil-ppmcal |
| Obtaining new oil parameters via saturation curve | Contact and provide E+E HQ the datasheet of the oil together with the saturation curve. After calculation of the oil specific parameters, the corresponding oil number is available, insert this in place of the xxx.  | Oil-calc   |

# Order Example

## Position 1: MOP301-AP2T10F13K2L200PA23C0

| Feature                    | Code    | Description   |
|----------------------------|---------|---|
| Approval                   | AP2     | DNV   |
| Type                       | T10     | Remote probe with sliding fitting, pressure-tight up to 20 bar (290 psi) and 120 °C (248°F) |
| Filter                     | F13     | Stainless steel, for flow <1 m/s  |
| Probe cable length         | K2      | 2 m (6.6 ft)  |
| Probe length               | L200    | 200 mm (7.9")   |
| Process connection         | PA23    | G 1/2" ISO - sliding fitting, Ø13 mm (0.51")  |
| Sensing element protection | C0      | Without coating   |
| Oil parameterization       | No code | Mineral transformer oil   |



# Order Example

## Positon 1: MOP301-T10F13K2L200PA23C0PPMxxx

| Feature                    | Code   | Description   |
|----------------------------|--------|---|
| Type                       | T10    | Remote probe with sliding fitting, pressure-tight up to 20 bar (290 psi) and 120 °C (248°F) |
| Filter                     | F13    | Stainless steel, for flow < 1 m/s   |
| Probe cable length         | K2     | 2 m (6.6 ft)  |
| Probe length               | L200   | 200 mm (7.9")   |
| Process connection         | PA23   | G 1/2" ISO - sliding fitting, Ø13 mm (0.51")  |
| Sensing element protection | C0     | Without   |
| Oil parameterization       | PPMxxx | Customer specific oil, oil parameters unknown   |

## Positon 2: Oil-ppmcal

Contact and provide E+E HQ the datasheet of the oil before sending us 2 litres of oil.

# Accessories

For further information please refer to the [Accessories](#) datasheet.

| Accessories  | Code  |
|--|---|
| Modbus configuration adapter   | HA011018  |
| E+E Product Configuration Software<br>(Free download: <a href="http://www.epluse.com/pcs10">www.epluse.com/pcs10</a> ) | PCS10   |
| Humidity calibration kit   | See data sheet <a href="#">Humidity Calibration Kit</a> |
| M12 Y adaptor  | HA030204  |
| Protection cap M12 socket  | HA010781  |
| Protection cap M12 plug  | HA010782  |
| Ball valve G 1/2" ISO  | HA050101  |
| Ball valve 1/2" NPT  | HA050104  |
| Sampling cell with shut-off function, PN40, DN25   | HA050109  |
| SWAGElok fitting for type T4   | ISO<br>NPT<br>HA011102<br>HA011103                      |



Company Headquarters &  
Production Site

**E+E Elektronik Ges.m.b.H.**  
Langwiesen 7  
4209 Engerwitzdorf | Austria  
T +43 7235 605-0  
F +43 7235 605-8  
info@epluse.com  
www.epluse.com

Subsidiaries

**E+E Sensor Technology (Shanghai) Co., Ltd.**  
T +86 21 6117 6129  
info@epluse.cn

**E+E Elektronik France SARL**  
T +33 4 74 72 35 82  
info.fr@epluse.com

**E+E Elektronik Deutschland GmbH**  
T +49 6171 69411-0  
info.de@epluse.com

**E+E Elektronik India Private Limited**  
T +91 990 440 5400  
info.in@epluse.com

**E+E Elektronik Italia S.r.l.**  
T +39 02 2707 86 36  
info.it@epluse.com

**E+E Korea Co., Ltd.**  
T +82 31 732 6050  
info.kr@epluse.com

**E+E Elektronik Corporation**  
T +1 847 490 0520  
info.us@epluse.com



—  
your partner  
in sensor  
technology.